



RECESSED IP44 LPSR & LPSS SERIES DOWNLIGHTS



No. 1



No. 2

SURFACE MOUNTED IP44 LPSRM & LPSSM SERIES DOWNLIGHTS



No. 3



No. 4

RECESSED FRAMELESS IP65 LPFR & LPFS SERIES DOWNLIGHTS



No. 5



No. 6

RECESSED SPOTLIGHT IP20 SP SERIES DOWNLIGHTS




No. 7

RECESSED LPSR & LPSS SERIES

1 OVER 100 SKU AVAILABLE

2 RETAIL-FRIENDLY PACKAGING

3 10 PCS PER SECONDARY PACKAGING




HD PICTURES FOR ONLINE STORES **4**

SLEEK AND MODERN DESIGN **5**

IP 44

IP RATING **6**



POWDER-COATED & ELECTROPLATED ALUMINIUM BODY FINISHING **7**

SMD 2835 CHIPS KNOWN FOR THEIR RELIABILITY **8**



PERFECT CEILING FIT **9**





No.	Model	Wattage	Lumens	CCT	IP Rating	Dimensions (L1xHxL2)
1.1	LPSR-08xyWQ	8 W	720 lm	3000/4000/6000 K	44	90x8x70 mm
1.2	LPSR-16xyWQ	16 W	1450 lm	3000/4000/6000 K	44	145x8x125 mm
1.3	LPSR-24xyWQ	24 W	2160 lm	3000/4000/6000 K	44	170x8x150 mm

y = W, B, R, C
x = W, N, C




No.	Model	Wattage	Lumens	CCT	IP Rating	Dimensions (L1xHxL2)
2.1	LPSS-08xyWQ	8 W	720 lm	3000/4000/6000 K	44	90x8x70 mm
2.2	LPSS-16xyWQ	16 W	1450 lm	3000/4000/6000 K	44	145x8x125 mm
2.3	LPSS-24xyWQ	24 W	2160 lm	3000/4000/6000 K	44	170x8x150 mm
2.4	LPSS-30xyWQ	30 W	2700 lm	3000/4000/6000 K	44	220x8x200 mm

y = W, B
x = W, N, C

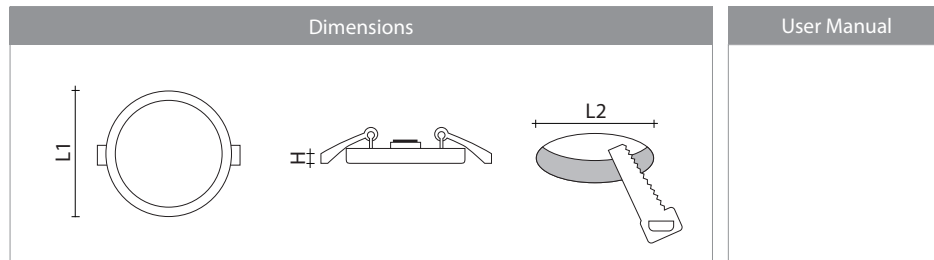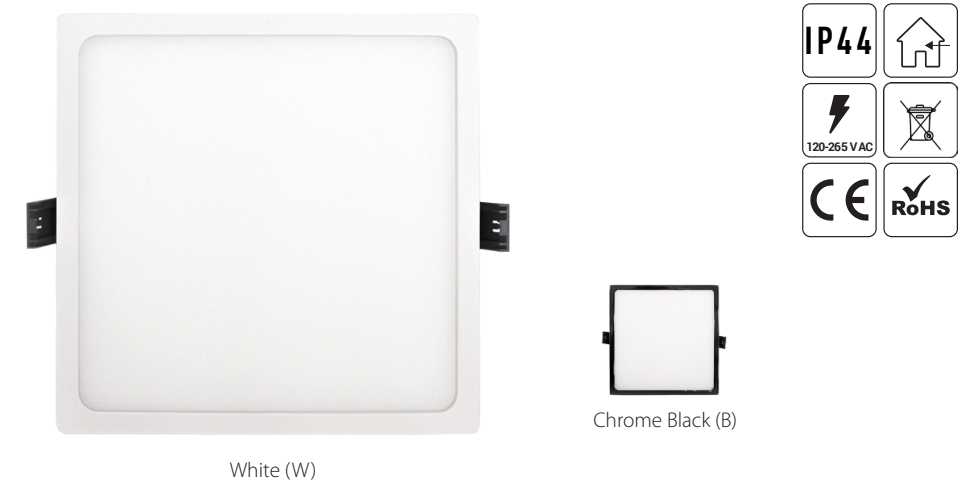

Package dimensions	LED panel LPSR-16W-Q	L B H			PCS/CTN	G.W.	N.W.	
		L	B	H				
		8 W	385 mm	275 mm	220 mm	40 vnt.	5.99 kg	5.65 kg
		16 W	385 mm	335 mm	215 mm	20 vnt.	6.70 kg	6.50 kg
		24 W	385 mm	375 mm	235 mm	20 vnt.	9.17 kg	8.87 kg

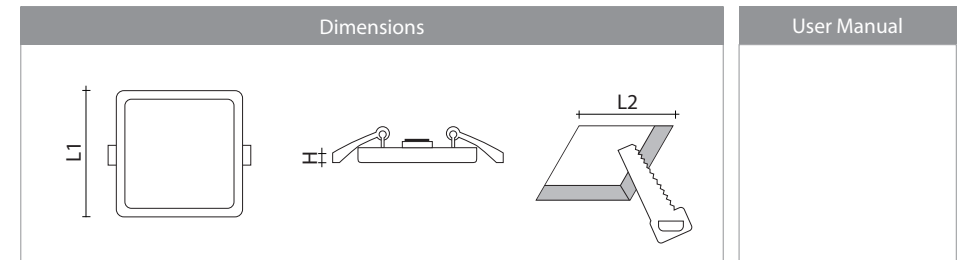

Package dimensions	LED panel LPSS-16W-Q	L B H			PCS/CTN	G.W.	N.W.	
		L	B	H				
		8 W	385 mm	275 mm	220 mm	40 vnt.	5.99 kg	5.65 kg
		16 W	385 mm	335 mm	215 mm	20 vnt.	6.70 kg	6.50 kg
		24 W	385 mm	375 mm	235 mm	20 vnt.	9.17 kg	8.87 kg



SURFACE MOUNTED LPSRM & LPSSM SERIES

1 OVER 100 SKU AVAILABLE

2 RETAIL-FRIENDLY PACKAGING

3 10 PCS PER SECONDARY PACKAGING



4 HD PICTURES FOR ONLINE STORES

5 SLEEK AND MODERN DESIGN



IP 44

IP RATING 6

POWDER-COATED & ELECTROPLATED ALUMINIUM BODY FINISHING 7

SMD 2835 CHIPS KNOWN FOR THEIR RELIABILITY 8



PERFECT CEILING FIT 9




No.	Model	Wattage	Lumens	CCT	IP Rating	Dimensions (LxH)
3.1	LPSRM-06xy-WQ	6 W	540 lm	3000/4000/6000 K	44	90x25 mm
3.2	LPSRM-12xy-WQ	12 W	1080 lm	3000/4000/6000 K	44	140x25 mm
3.3	LPSRM-18xy-WQ	18 W	1620 lm	3000/4000/6000 K	44	190x25 mm
3.4	LPSRM-24xy-WQ	24 W	2160 lm	3000/4000/6000 K	44	240x25 mm

y = W, B
x = W, N, C

No.	Model	Wattage	Lumens	CCT	IP Rating	Dimensions (LxH)
4.1	LPSSM-06xy-WQ	6 W	540 lm	3000/4000/6000 K	44	90x25 mm
4.2	LPSSM-12xy-WQ	12 W	1080 lm	3000/4000/6000 K	44	140x25 mm
4.3	LPSSM-18xy-WQ	18 W	1620 lm	3000/4000/6000 K	44	190x25 mm
4.4	LPSSM-24xy-WQ	24 W	2160 lm	3000/4000/6000 K	44	240x25 mm

y = W, B
x = W, N, C



Dimensions	User Manual

Dimensions	User Manual

Package dimensions					PCS/CTN	G.W.	N.W.				
		L	B	H							
		6 W	100 mm	100 mm				35 mm	20 vnt.	5.8 kg	5.3 kg
		12 W	340 mm	310 mm				170 mm	20 vnt.	6.6 kg	6.1 kg
		18 W	410 mm	340 mm				220 mm	20 vnt.	11.2 kg	10.7 kg
24 W	510 mm	540 mm	270 mm	20 vnt.	17 kg	16.5 kg					

Package dimensions					PCS/CTN	G.W.	N.W.				
		L	B	H							
		6 W	100 mm	100 mm				35 mm	20 vnt.	6.2 kg	5.8 kg
		12 W	340 mm	310 mm				170 mm	20 vnt.	7 kg	6.5 kg
		18 W	410 mm	340 mm				220 mm	20 vnt.	11.7 kg	11.2 kg
24 W	510 mm	540 mm	270 mm	20 vnt.	17.7 kg	17.2 kg					



RECESSED FRAMELESS LPFR & LPFS SERIES

1 OVER 50 SKU AVAILABLE

2 RETAIL-FRIENDLY PACKAGING

3 10 PCS PER SECONDARY PACKAGING



HD PICTURES FOR ONLINE STORES **4**

SLEEK AND MODERN DESIGN **5**

IP 65

IP RATING **6**

ALUMINIUM BODY AND NON-YELLOWING PMMA DIFFUSER **7**

SMD 2835 CHIPS KNOWN FOR THEIR RELIABILITY **8**

PERFECT CEILING FIT **9**




No.	Model	Wattage	Lumens	CCT	IP Rating	Dimensions (L1xHxL2)
5.1	LPFR-08Wx-V2	8 W	800 lm	3000/4000/6000 K	65	100x8.5x80 mm
5.2	LPFR-10Wx-V2	10 W	1000 lm	3000/4000/6000 K	65	125x8.5x105 mm
5.3	LPFR-14Wx-V2	14 W	1400 lm	3000/4000/6000 K	65	155x8.5x135 mm
5.4	LPFR-20Wx-V2	20 W	2000 lm	3000/4000/6000 K	65	185x8.5x165 mm
5.5	LPFR-26Wx-V2	26 W	2600 lm	3000/4000/6000 K	65	215x8.5x195 mm

x = W, N, C



No.	Model	Wattage	Lumens	CCT	IP Rating	Dimensions (L1xHxL2)
6.1	LPFS-08Wx-V2	8 W	800 lm	3000/4000/6000 K	65	100x8.5x80 mm
6.2	LPFS-10Wx-V2	10 W	1000 lm	3000/4000/6000 K	65	125x8.5x105 mm
6.3	LPFS-14Wx-V2	14 W	1400 lm	3000/4000/6000 K	65	155x8.5x135 mm
6.4	LPFS-20Wx-V2	20 W	2000 lm	3000/4000/6000 K	65	185x8.5x165 mm
6.5	LPFS-26Wx-V2	26 W	2200 lm	3000/4000/6000 K	65	215x8.5 mm

x = W, N, C



Dimensions

User Manual

Package dimensions

	L	B	H	PCS/CTN	G.W.	N.W.
8 W	305 mm	140 mm	155 mm	10 vnt.	1.9 kg	1.5 kg
10 W	305 mm	168 mm	180 mm	10 vnt.	2.3 kg	1.8 kg
14 W	305 mm	195 mm	210 mm	10 vnt.	3.3 kg	2.7 kg
20 W	305 mm	225 mm	245 mm	10 vnt.	4.3 kg	3.7 kg

Dimensions

User Manual

Package dimensions

	L	B	H	PCS/CTN	G.W.	N.W.
8 W	305 mm	140 mm	155 mm	10 vnt.	1.9 kg	1.5 kg
10 W	305 mm	168 mm	180 mm	10 vnt.	2.3 kg	1.8 kg
14 W	305 mm	195 mm	210 mm	10 vnt.	3.3 kg	2.7 kg
20 W	305 mm	225 mm	245 mm	10 vnt.	4.3 kg	3.7 kg



1 48 SKU AVAILABLE

2 RETAIL-FRIENDLY PACKAGING

4 HD PICTURES FOR ONLINE STORES

6 POWDER-COATED & ELECTROPLATED ALUMINIUM BODY FINISHING

RECESSED SPOTLIGHT SP SERIES

10 PCS PER SECONDARY PACKAGING

TILTABLE LIGHT SOURCE

7 SMD 2835 CHIPS KNOWN FOR THEIR RELIABILITY

8 EASILY CHANGEABLE LIGHT SOURCE



No.	Model	Wattage	Lumens	CCT	IP Rating	Dimensions (L1xHxL2)
7.1	SP-07NAW-B	7 W	630 lm	3000/4000/6000 K	20	84x40x70 mm
7.2	SP-07NAB-B	7 W	630 lm	3000/4000/6000 K	20	84x40x70 mm
7.3	SP-07NAT-B	7 W	630 lm	3000/4000/6000 K	20	84x40x70 mm
7.4	SP-07NAR-B	7 W	630 lm	3000/4000/6000 K	20	84x40x70 mm



Bronze (R)



White (W)



Black (B)



Titan (T)



Dimensions	User Manual

Package dimensions	Dimensions			PCS/CTN	G.W.	N.W.
	L	B	H			
	7.1	470 mm	330 mm	380 mm	100 vnt.	11.5 kg 12 kg
	7.2	470 mm	330 mm	380 mm	100 vnt.	11.5 kg 12 kg
	7.3	470 mm	330 mm	380 mm	100 vnt.	11.5 kg 12 kg
	7.4	470 mm	330 mm	380 mm	100 vnt.	11.5 kg 12 kg



Contacts

T: +447 441 370528

C: +370 685 38111

E: export@ledlife.lt

WeChat/WhatsApp:
+370 685 38111

www.ledlife.lt

HOME LIGHTING

